


Specification	SWB-10L-1	SWB-10L-2
Number of Stirring Mechanism	1	2
Stirring Speed	400 ~ 1800rpm	
Bath Capability	approx. 10L	
Display	LCD	
Heating Power	600W	
Controller	Digital microprocessor controller	
Bath Temperature	5 °C above ambient to 99°C	
Temperature Increment	0.1°C	
Temperature Calibration	Yes	
Timer	Up to 99(hr): 59(min), continuous	
Safety Device	Warning indication on screen with alarm and automatically shut down	
Operation Temperature	Ambient to 40°C	
Bath Tank Material	304 stainless steel	
Bath Inner Dimension (W x L x H)	240 x 300 x 150mm	
Unit Dimension (W x L x H)	255 x 355 x 240mm (without lid)	
Construction	Painted iron metal	
Lid Material	Transparent acrylic material assembled with stainless steel construction	
Communication Port	RS 232	
Weight	approx. 9.0kg	
Rated Voltage	110V or 220V	

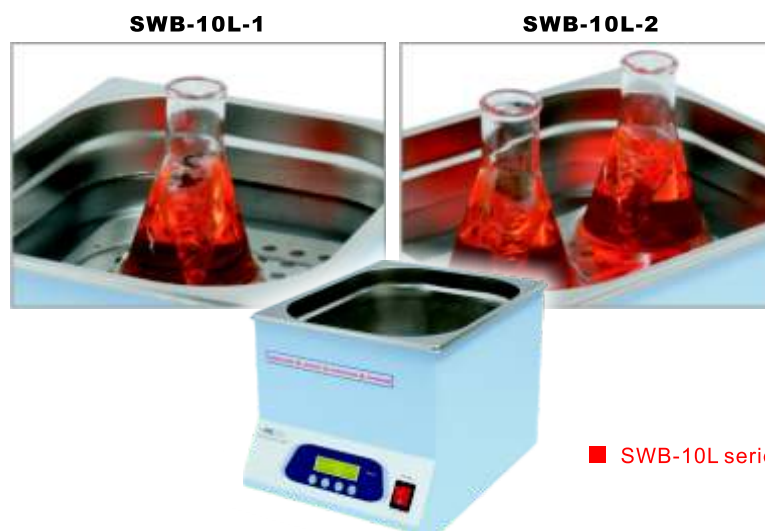

Ordering Information

SWB-10L-1-110/220	Stirring Water Bath (10L) with 1 built-in stirring mechanism
SWB-10L-2-110/220	Stirring Water Bath (10L) with 2 built-in stirring mechanisms
SWB-RS232	RS 232 cable
SWB-DLSW	Data Logging software package
SWB-DLSW-R	Data Logging software package, including a RS 232 cable